
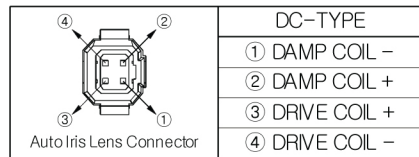



2.2 Megapixel HD-SDI Compact C/CS Tube Camera

FEATURES

- 1/3" Panasonic 2.2 Megapixel CMOS Sensor
- C/CS Mount with Auto-Iris, lens sold separately
- 1080p/30, 720p/60 (NTSC & PAL)
- HD-SDI (BNC) & CVBS (BNC) simultaneous streams
- 0.5Lux (color), 0.1Lux (b/w), 0.02Lux (Sens-up 30x)
- Wide Dynamic Range (ACCE), DNR (2D+3D), Digital Defog, HLC
- Privacy Masking, Motion Detection, Automatic White Balance
- 12V DC (Marshall PN: V-PS12-500, sold separately)
- 58mm x 60mm x 81mm, 340grams
- Also available in 1080p/60 (3G-SDI)
- OSD Joystick on cable, RS-485



DC-TYPE	
①	DAMP COIL -
②	DAMP COIL +
③	DRIVE COIL +
④	DRIVE COIL -

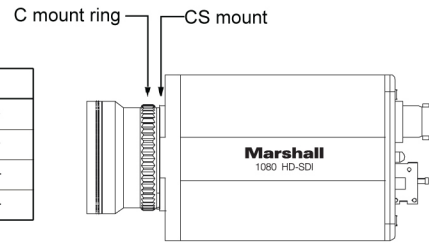

SPECIFICATIONS

Imaging Sensor	1/3" Panaspoc 2.2 Mega-pixel CMOS Sensor
Scannin System	Progressive Scan
Number of Active Pixels	1944 (H) x 1092 (V) = 2,122,848 (pixel)
Number of effective Pixels	2010 (H) x 1108 (V) = 2,227,080 (pixel)
S/N Ratio	More than 50dB
Video Output Mode	1080P (1920x1080) 25/30
Video Output Level	HD-SDI / 1.0Vp-p (75Ω, Composite) NTSC/PAL (selectable)
Min. Illumination	0.5Lux (Color), 0.1Lux (B/W), 0.02Lux (Sens-up 30 x)
Lens	C & CS mount lenses (Lens not included)
Electronic Shutter Speed	Auto/Flk/ 1/30sec~1/50,000sec/ X2~30/sec
White Balance	AWB/AWC-Set/Manual/Indoor/Outdoor
Backlight Compensation	BLC/HSBLC/Off
D-WDR/ACCE	Low/Middle/High/Off
AGC	Low/Middle/High
Adjust	Sharpness/Monitor/LSC/NTSC/PAL
Language	English, Japanese, Chinese
Day & Night	Auto/BW/Color/EXT(Selectable)
2D/3D-NR	2DNR/3DNR/SMART NR

Digital Zoom/PIP	ON/Off (x2~x64)
Privacy Masking	On/Off (8 Zone Selectable)
Motion Detection	On/Off (3 Zone Selectable)
Defect	LIVE DPC/STATIC DPC
Sens-Up	On (X2~X30) / Off
D-EFFECT	Freeze/Mirror/D-Zoom/NEG.IMAGE
IR LED	-
Construction	Aluminum Die-Casting Case
Operating Temp	-10°C~50°C(14 °F~122°F)
Storage Temp	-20°C~60°C(-4°F~140°F)
Humidity	0% to 90%
Supplied Voltage	DC12V 10% ±10%
Power Consumption	Max.150mA
Dimensions (WxHxD)	58mm x 60mm x 81mm
Weight	340g
Certification	CE, FCC, RoHS, KCE